



## Standard Top Bowl

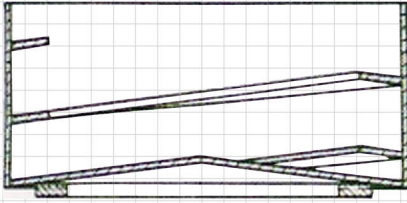

### Cylindrical Bowl

- Provide constant feeding of components
- Ideal for small components


Drive Unit	Applicable Bowl Diameter (Ø)	Track Width (mm)	Height (mm)
DF-15	160	12	65
BF-25	250	20	90
BF-35	350	25	120
BF-45	450	40	180
BF-50	550	50	140
BF-60	650	50	180

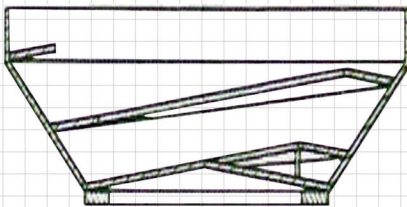

### Conical Bowl

- Pre-separation of components
- Higher capacity
- Ideal for heavy sharp-edges components

Drive Unit	Applicable Bowl Diameter (Ø)	Track Width (mm)	Height (mm)
DF-15	180	15	65
BF-25	300	20	90
BF-35	400	30	120
BF-45	500	60	140
BF-50	650	50	180

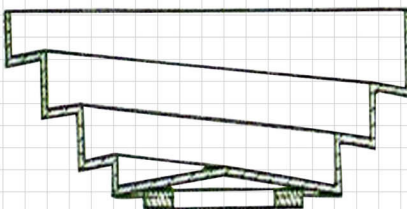

### Stepped Bowl

- Larger feeding track width
- Pre-orientate components
- Larger capacity
- Ideal for larger loads

Drive Unit	Applicable Bowl Diameter (Ø)	Track Width (mm)	Height (mm)
DF-15	180	15	90
DF-25	300	20	120
BF-35	350	32	140
BF-45	450	40	140
BF-50	600	50	180
BF-60	720	65	200