



## Standard Top Bowl

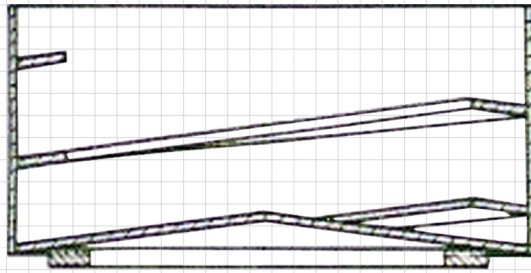


- Provide constant feeding of components.
- Ideal for small components.

Drive Unit	Applicable Bowl Diameter ( $\varnothing$ )	Track Width (mm)	Height (mm)
DF-15	160	12	65
BF-25	250	20	90
BF-35	350	25	120
BF-45	450	40	140
BF-50	550	50	160
BF-60	650	50	180

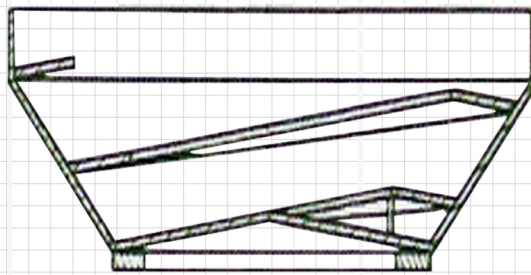

- Pre-separation of components.
- Higher capacity.
- Ideal for heavy sharp-edges components.

Drive Unit	Applicable Bowl Diameter ( $\varnothing$ )	Track Width (mm)	Height (mm)
DF-15	200	15	65
BF-25	350	20	90
BF-35	400	30	120
BF-45	500	40	140
BF-50	600	50	160
BF-60	700	50	180

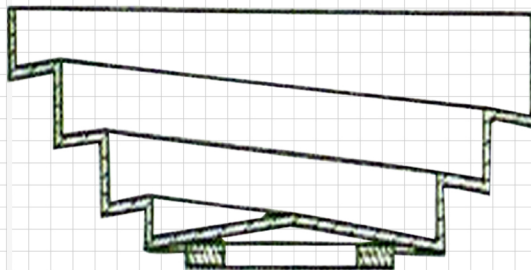

- Large feeding track width.
- Pre-orientate components.
- Larger capacity.
- Ideal for larger loads.

Drive Unit	Applicable Bowl Diameter ( $\varnothing$ )	Track Width (mm)	Height (mm)
DF-15	200	15	80
DF-25	350	20	100
BF-35	400	30	120
BF-45	500	40	140
BF-50	600	50	160
BF-60	700	60	180